



# BIGFOOT 3000



- AC powered
- 18 mph (29 km/h) speed
- 40 mi (64 km) range
- 3000 lb (1360 kg) load capacity\*

## COMFORT & PERFORMANCE UTILITY VEHICLE



An addition to the BIGFOOT line of electric “Comfort & Performance” vehicles, the Bigfoot 3000 is a utility vehicle which competes with gasoline vehicles in outdoor applications.

Equipped with a 48 volt AC motor, our GT drive and rack and pinion steering, this vehicle travels at 18 mph with a distance up to 40 miles.

Standard features include deluxe cab, aluminum drop-down sides, durable frame design, four-wheel hydraulic brakes and heavy-duty drive train that ensures reliability and low maintenance costs.

For additional vehicle images, videos, information and custom modifications visit [taylor-dunn.com](http://taylor-dunn.com).

<b>VOLTAGE</b>	48 volt	
<b>SPEED</b>	up to 18 mph	up to 29 km/h
<b>RANGE</b>	up to 40 mi	up to 64 km
<b>LOAD CAPACITY</b>	up to 3,000 lb	1360 kg
<b>TOW CAPACITY</b>	up to 10,000 lb	4535 kg
<b>BED SIZE (W x L)</b>	48x74 in	122x188 cm
<b>TURNING RADIUS</b>	145 in	368 cm

\* Based on Standard Configuration

Typical Capacity: Actual load capacity depends on application and vehicle configuration.

### FEATURES & BENEFITS:

- XL Operator’s Compartment
- Tilted Steering
- Adjustable Seats



Dual USB Port



Adjustable Seats



Clear View Display



Recessed Tie-downs



Large Compartment



LED Lighting



Tilted Steering

# BIGFOOT 3000




## PERFORMANCE

<b>LOAD CAPACITY</b>	3,000 lb	1360 kg
<b>MAX SPEED (UNLOADED)</b>	18 mph	29 km/h
<b>TURNING RADIUS</b>	145 in	368 cm
<b>TOW CAPACITY</b>	10,000 lb	4535 kg

## DIMENSIONS

<b>OVERALL LENGTH</b>	135 in	343 cm
<b>OVERALL WIDTH</b>	57 in	145 cm
<b>HEIGHT</b>	74 in	188 cm
<b>WHEEL BASE</b>	62 in	157 cm
<b>GROUND CLEARANCE</b>	5.8 in	14.7 cm
<b>BED SIZE</b>	48x74 in	122x188 cm

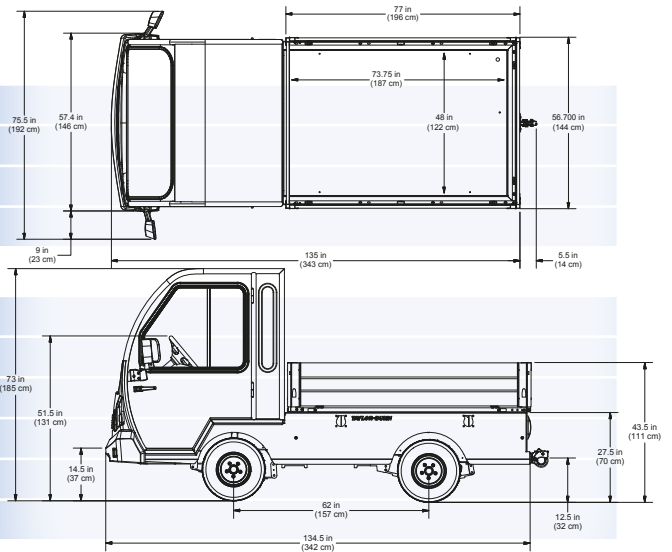

## POWER SUPPLY / DRIVE TRAIN

<b>MOTOR</b>	17 hp, 13 kW, AC
<b>SYSTEM VOLTAGE</b>	48 volt
<b>DRIVE AXLE</b>	Helical gear, oil bath transaxle, GT automotive differential
<b>BATTERIES</b>	260 amp-hour, lead acid, 6 volt, 8 each
<b>CHARGER</b>	Built-in, 48V, 115 VAC/60 Hz, 1kW w/ interlock, High Frequency Technology
<b>CONTROLLER</b>	Solid-state self diagnostic AC speed controller

## CHASSIS

<b>FRAME</b>	Fully welded, unitized, 12 gauge, smooth skin
<b>STEERING</b>	Rack and pinion
<b>SUSPENSION</b>	Multi-leaf springs, front & rear
<b>BRAKES</b>	Hydraulic disc brakes, front & rear, electric parking brake
<b>BUMPERS</b>	Heavy duty steel integrated front & rear
<b>TIRES</b>	20.5 x 8 x 10, load range E, pneumatic



GT Automotive Drive

## GENERAL

<b>UNIT WEIGHT</b>	2265 lb	1027 kg
<b>SEATS</b>	Adjustable black bucket seats, driver's seat electrical interlock, 2 person	
<b>INSTRUMENTATION</b>	Clear view display (speed, distance, battery status indicator, hours, input diagnostic & fault code display), dual USB port, emergency power cut-off switch, light switch, forward/off/reverse selector, reverse buzzer, high/low speed selector, key switch, DC/DC converter (on with key switch), and floor horn switch	
<b>LIGHT ACCESSORIES</b>	Dual halogen headlights, LED taillights, brake lights and directional signals	
<b>CONFORMANCE</b>	Type E OSHA 1910.178, ANSI B56.8	

## OPTIONS

- PORTABLE CHARGER
- STROBE LIGHT
- DOME LIGHT
- LADDER RACK
- HEATER
- DIAMOND PLATE DECK
- LOCKABLE CARGO BOX
- LIFT OUT BATTERY BOX
- FLAT BED DUMP
- STEEL PANEL BOX
- BATTERY WATERING SYSTEM
- VARIOUS HITCHES
- UNDERCOATING
- GALVANIZED FRAME
- OPTIONAL PAINT COLORS



CONTRACT # 051717-PSI



\*Specifications, standard equipment, accessories and modifications are all subject to change without notice.

BF-030-48-1 11/17