



Stepsaver

- 9 mph (14 km/h) speed
- 75 in (190 cm) turning radius
- 600 lb (272 kg) load capacity



EFFICIENT & VERSATILE PERSONNEL CARRIERS



MODEL	SS-534	SS-536
SPEED (unloaded)	10 mph (16 km)	9 mph (14 km)
RANGE (unloaded)	20 mi (32 km)	20 mi (32 km)
LOAD CAPACITY	500 lb (227 kg)	600 lb (272 kg)
TOW CAPACITY	4250 lb (1927 kg)	2,000 lb (907 kg)
BED SIZE (WxL)	27x17 in (112x160 cm)	30x19 in (112x160 cm)

FEATURES & BENEFITS:

- All-welded unitized steel body
- On-board charger
- Modularized control system
- Customizable to fit your application

* **Based on Standard Configuration** Actual towing capacity is dependent on application, vehicle configuration, ballast weight, and operating environment.
Note: Photos are shown with optional features.

Taylor-Dunn's Stepsaver provides personnel transportation for executives, supervisors, security, maintenance, mail carriers, and other workers whose jobs keep them on the go.

Stepsaver's versatile design allows you to convert the vehicle from personnel carrier to burden carrier in a matter of seconds. These vehicles can carry up to two people or 600 lb. of load to the job site.

Stepsaver's standard features include horn, modularized control system, tiller-loop steering, on-board charger, and an all-welded steel unitized body and frame. Additional standard features on the SS-536 include headlight, taillight, brake light, and flip-down passenger seat.


Visit our website for images, videos, information, and custom modification ideas at taylor-dunn.com.



Stepsaver



PERFORMANCE

LOAD CAPACITY lb (kg)	534: 500 (227)	536: 600 (272)
TOW CAPACITY lb (kg)	534: 4250 (1927)	536: 2000 (907)
MAX SPEED mph (km/h)	534: 10 (16)	536: 9 (14)
TURNING RADIUS	75 in (190 cm)	

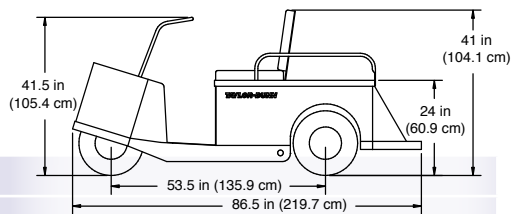

DIMENSIONS

OVERALL LENGTH in (cm)	534: 76.5 (194)	536: 86.5 (220)
OVERALL WIDTH	30 in (76 cm)	
HEIGHT (- cab)	41.5 in (105 cm)	
HEIGHT (+ cab)	69.5 in (175 cm)	
DECK HEIGHT	24 in (61 cm)	
WHEEL BASE	53.5 in (136 cm)	
DECK SIZE in (cm)	534: 27x17 (69x43)	536: 30x19 (76x48)

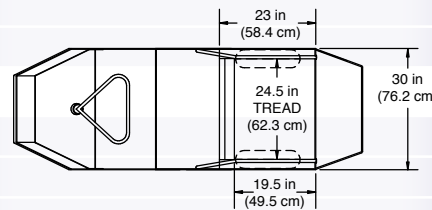

POWER SUPPLY / DRIVE TRAIN

MOTOR	24V, 935 rpm, DC, Series Wound, 4.5 hp
SYSTEM VOLTAGE	24V DC
TRANSMISSION	Transaxle Assembly, Sealed Helical Gear, 12:1 Reduction
BATTERIES	Four, 6V, 210 Amp-Hour, Lead Acid
CHARGER	Built-in, 24V, 600 Watt, 25 Amp, 110 VAC, w/ Interlock
CONTROLLER	275 Amp, Solid State Speed Controller
WIRING	Modular Harness Design, Weather Protected Connectors

CHASSIS

FRAME	Fully Welded Unitized 16 Gauge Diamond Plate Steel
STEERING	Tiller Loop, Manual
DRIVE AXLE	534: Belt Drive 536: Direct Drive
SUSPENSION	534: Front Shock Absorber, Rear Coil Springs 536: Coil Springs, Front and Rear
BRAKES	534: Center Brake Band 536: Drum with Foot Operated Parking Brake
TIRES	4.80 x 8 Load Range B Pneumatic

GENERAL

UNIT WEIGHT lb (kg)	534: 713 (323)	536: 701 (318)
SEAT	534: Seat Cushion, Black Vinyl 536: Seat Cushion, Back Rest Converts to Passenger Seat	
INSTRUMENTATION	Battery Status Indicator, Forward/Reverse Selector Switch, Key Switch, Electric Horn, 12V DC/DC Converter (on with key switch)	
LIGHT ACCESSORIES	536: Head Light, Taillight, Brake Light (<i>optional on SS-534</i>)	
CONFORMANCE	Type E OSHA 1910.178, ANSI B56.8	

OPTIONS

- PORTABLE CHARGER
- SMOOTH SKIN BODY
- STEEL CAB
- STROBE LIGHT
- FRONT BUMPER
- DIAMOND PLATE DECK
- BATTERY WATERING SYSTEM
- HOUR METER
- REVERSE ALARM
- GEARED STEERING
- NON-MARKING TIRES
- SOFT SOLID TIRES
- UNDERCOATING/GALVANIZING
- VARIOUS HITCHES
- OPTIONAL PAINT COLORS

SS-534 OPTIONS

- FLIP-DOWN PASSENGER SEAT
- HEAD/TAIL/BRAKE LIGHTS
- SPEEDS OF 5,7,OR 9 MPH

Specifications, standard equipment, accessories and modifications are subject to change without notice.