

STEPSAVER

Designed For Versatile Applications

MODEL	SS5-46
TYPE	Electric
SPEED (MAX MPH)	9 (14.5 kmph)
RANGE (MILES)	20 (32 km)
LOAD CAPACITY (lbs)	600 (272 kg)
BED SIZE (W"xL")	30x19 (76 x 48 cm)
VOLTAGE	24
TURNING RADIUS (INCHES)	81" (206 cm)

Based on Standard Configuration

*Typical capacity: Actual load capacity depends on application and vehicle configuration



Tough and Dependable Product Solutions

Vehicles may be shown with optional equipment

This 4 wheel Stepsaver provides time proven reliable personnel transportation for executive, supervisors, security, maintenance, mail carriers and other workers whose job keeps them on the go.

Stepsaver's versatile design allows you to convert the vehicle from personnel carrier to burden carrier in a matter of seconds. This vehicle can carry up to two people or 600 lbs. of load on the job site.

With its innovative articulated front axle design, Stepsaver offers a short turning radius, that can maneuver dependably around warehouses, industrial complexes, resorts and hotels, shopping malls, hospitals and other commercial complexes.

It's all welded steel unitized body and frame is built to last for years of use, with standard front bumper and an automotive steering wheel. Modularized control system design provides ease of maintenance on all electrical systems. Geared steering, 9 mph speed, and on-board charger provide safety, efficiency and convenience during daily operation.

With more than 150,000 vehicles in service and over 50 years experience in providing solutions to our customers, Taylor-Dunn® products are the best way to go about your business.



TAYLOR-DUNN®
Commercial and Industrial Vehicles Since 1949

The best way to go about your business

PERSONNEL CARRIERS



Aristocrat



Roadmaster



Taylortruck



Loadmaster



Model B Series



Electruck



Maintenance Expediter



Stepsaver



Stockchaser

TOW TRACTORS



Towmaster



Mule



Pullmaster




Model E



Huskey

SS5-46

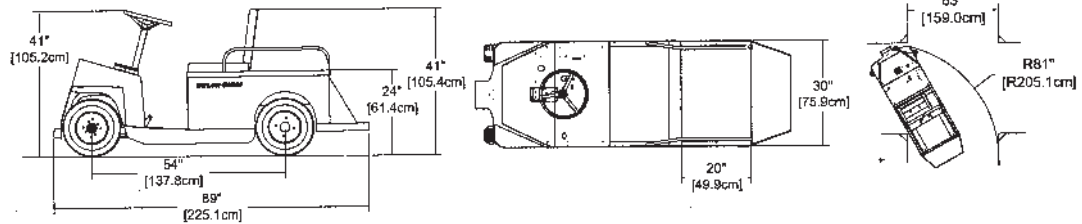

STEPSAVER STANDARD SPECIFICATIONS

Product Line	MODEL SS5-46
Unit Weight Lbs (Kgs):	830 (376 Kg.)
Wheels:	4 Wheels
Load Capacity Lbs (Kgs):	600 (272 Kg.)
Battery Type (Lead Acid):	217 Amp-Hours, 6 Volts, 4 Each
System Voltage:	24 Volt, DC
Drive Axle:	Direct Drive, Oil Bath
Transmission:	12:1 Reduction
Motor:	DC Series Wound 4.5 hp, 24 V Intermitant (1.5 HP @ 60 Min. Rating)
Tires Pneumatic:	4.80 x 8 Load Range B
Brakes:	Two Wheel Mechanical Rear Drum, Foot Operated Parking Brake
Steering:	Automotive Steering Wheel, Geared Steering
Frame:	All Steel Unitized Body, Heavy Duty 16 Gauge Diamond Plate Steel, Standard Front Bumper and Geared Steering
Suspension:	Articulated Front Axle, Coil Springs, Rear
Color:	Safety Orange
Seats:	Foam Padded Cushion and backrest; Flip Down Seat for Passenger
Controller:	Solid State Speed Controller 275 amp 24 Volt
Instrumentation:	Battery Discharge Indicator, Forward/Reverse Selector, Key Switch, Seat Switch
Light Accessories:	Headlight, Taillight, Stop Light
Charger:	25 Amp, 24V Built In Automatic Charger W/Interlock
Input Voltage:	110 Volt/60 Hz.
Conformance Standards:	Type E OSHA Requirements 1910.178, ANSI B56.8 Requirements

STEPSAVER OPTIONAL FEATURES

Charger

- Portable 25 amp charger
- Portable 25 amp charger
- Built in 110V/220V 50 hz

Accessories

- Strobe light, amber - on pole
- Reverse alarm
- Hour meter

Tires

- Soft Solid Tires

Deck

- Diamond plate deck
- Clipboard holder

Battery

- 244 amp hr battery

Frame

- Smooth skin

Color

- White or special paint color
- Undercoating



TAYLOR-DUNN CORPORATION
Commercial and Industrial Vehicles Since 1949



METRO CROWN INTERNATIONAL
A TAYLOR-DUNN COMPANY



TIGER TRACTOR
A TAYLOR-DUNN COMPANY



UNITED TRACTOR
A TAYLOR-DUNN COMPANY

2114 West Ball Road, Anaheim, CA 92804 • (714) 956-4040 • FAX (714) 956-3130
Toll Free (800) 688-8680 Visit our website: www.taylor-dunn.com